


8300 Series - Drop Ceiling Grid Installation

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- 2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Anchor track via a 2" #8 self tapping screw hex head or pan head recommended. Track will be anchored directly to the drop ceiling grid.
- 4. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 5. Make sure that both ends of the tracks and the end stops are secured to the ceiling.



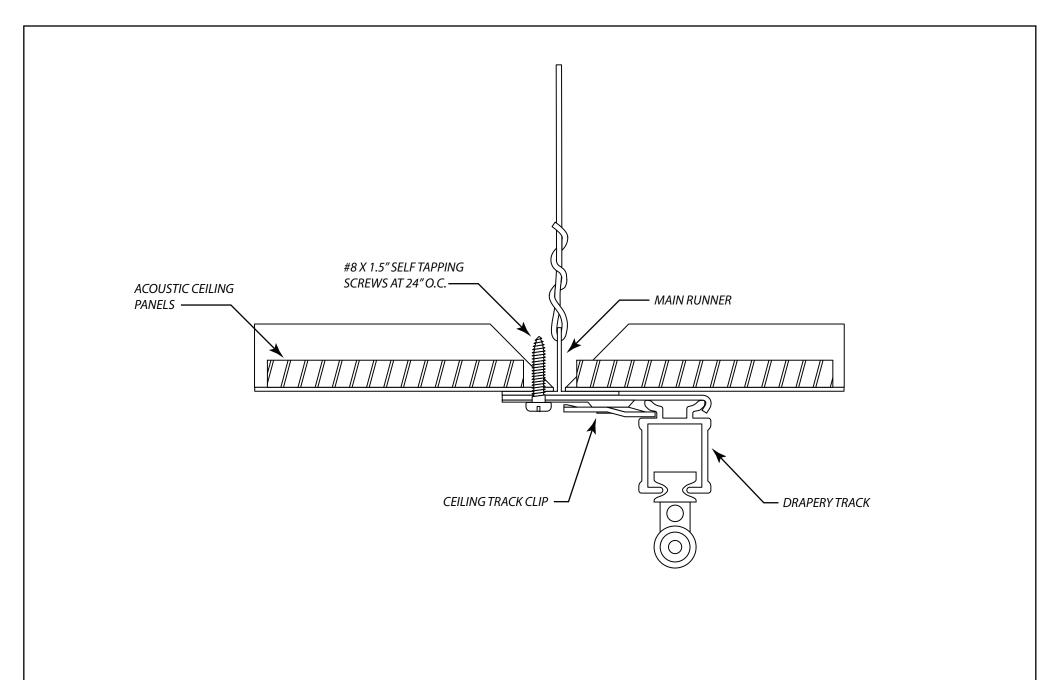

All materials disclosed in this document are proprietary to Drop Ceiling Installation Diamond Drapery Co., Inc. The confidence and must not replicate or reveal this information in any manner.

Project:

Dimensions: Inches/Feet

Scale: Ву: DO NOT SCALE C. Johnson






8300 SERIES - SHEETROCK (DRYWALL) CEILING INSTALLATION

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- 2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Pre-drill the ceiling.
- 4. Anchor track via a 3" hex head bolt and wings. Toggle will be 1/8" in diameter. Slotted hex head or Robertson head is recommended.
- 5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 6. Make sure that both ends of the tracks and the end stops are secured to the ceiling.



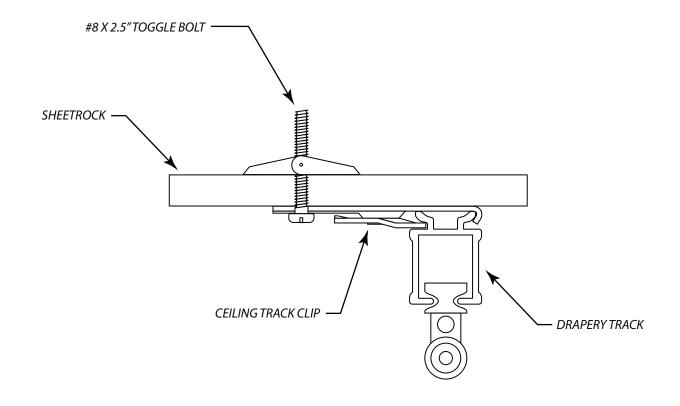

All materials disclosed in this 8300 Series Tracking System document are proprietary to Sheetrock Installation Diamond Drapery Co., Inc. The Holder agrees to maintain it in 24-NOV-2008 confidence and must not replicate or reveal this information in any manner.

Project:

DO NOT SCALE

Dimensions: Inches/Feet Ву:

C. Johnson






8300 SERIES - SHEETROCK (DRYWALL) WALL INSTALLATION

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- 2. Begin on one end of the track; and mark the holes on the wall. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Pre-drill the wall.
- 4. Anchor wall bracket via a 3" hex head bolt and wings. Toggle will be 1/8" in diameter. Slotted hex head or Robertson head is recommended.
- 5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 6. Make sure that both ends of the tracks and the end stops are secured to the wall.



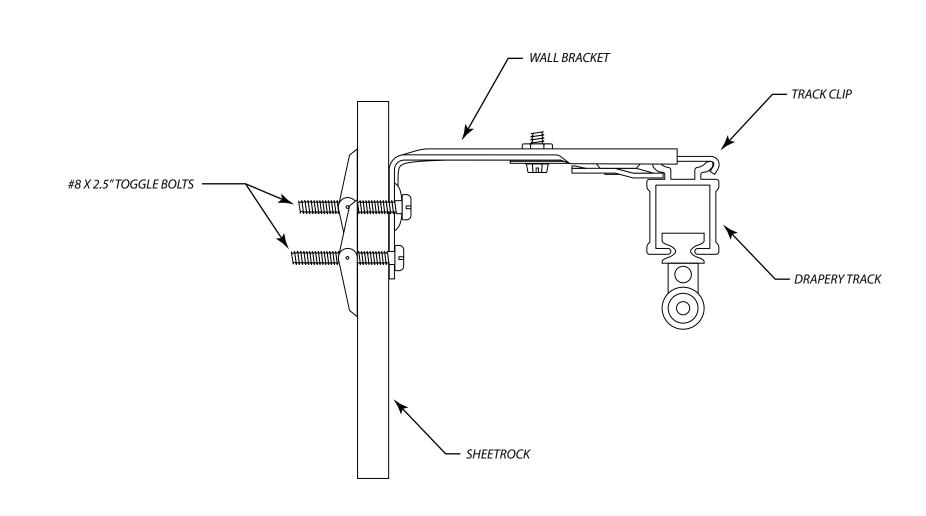

document are proprietary to Sheertrock Wall Mount Installation Diamond Drapery Co., Inc. The Holder agrees to maintain it in 24-NOV-2008 confidence and must not replicate or reveal this information in any manner.

Project:

All materials disclosed in this 8300 Series Tracking System

Dimensions: Inches/Feet Scale: Ву: DO NOT SCALE C. Johnson






8300 Series - Wood Ceiling Installation

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- 2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Anchor track via a 2" #8 self tapping screw hex head or pan head recommended. Track will be anchored directly to the wood block.
- 4. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 5. Make sure that both ends of the tracks and the end stops are secured to the ceiling.



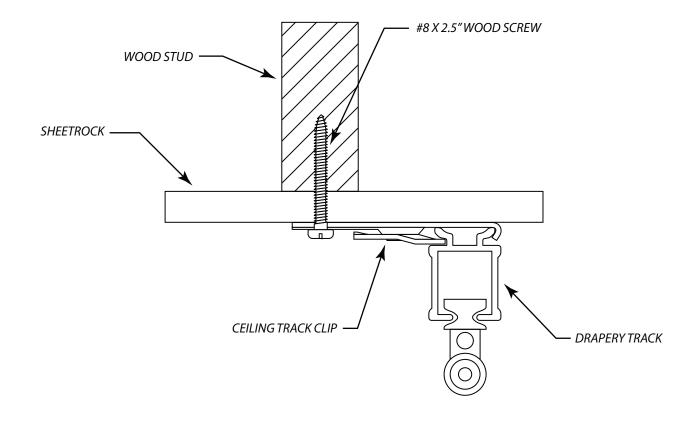

All materials disclosed in this 8300 Series Tracking System document are proprietary to Wood Stud Installation Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

Project:

Date:	Dimensions:
24-NOV-2008	Inches/Feet
Scale:	Ву:
DO NOT SCALE	C. Johnson






8300 SERIES - WOOD WALL INSTALLATION

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- 2. Begin on one end of the track; and mark the holes on the wall. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Anchor track via a 2" #8 self tapping screw hex head or pan head recommended. Track will be anchored directly to the drop ceiling grid.
- 4. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 5. Make sure that both ends of the tracks and the end stops are secured to the wall.



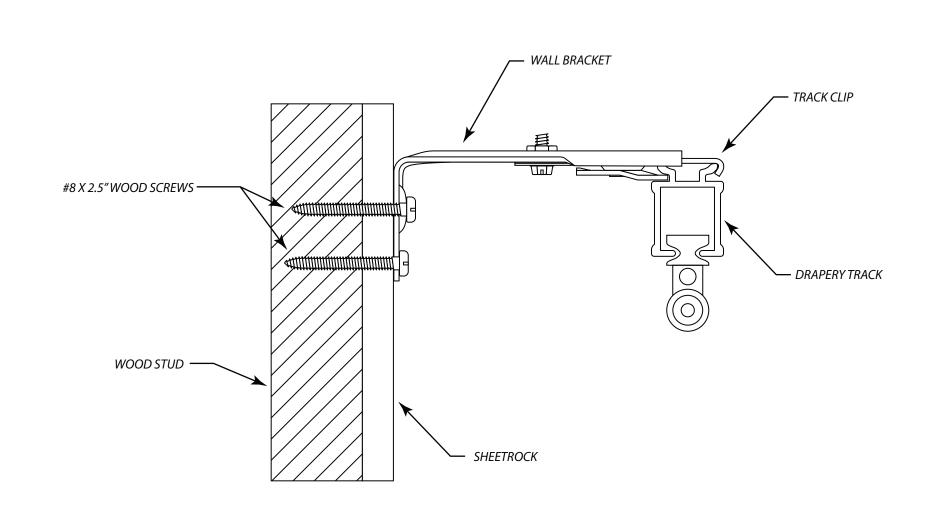

All materials disclosed in this document are proprietary to Wall Mount Installation Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

Project:

8300 Series Tracking System

Dimensions: 24-NOV-2008 Inches/Feet Scale: Ву: DO NOT SCALE C. Johnson






8300 Series - Concrete Ceiling Installation

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- 2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Pre-drill the ceiling. Insert a 1 1/4" concrete anchor.
- 4. Anchor track via a 1 1/4" #8 self tapping screw hex head or pan head recommended.
- 5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 6. Make sure that both ends of the tracks and the end stops are secured to the ceiling.



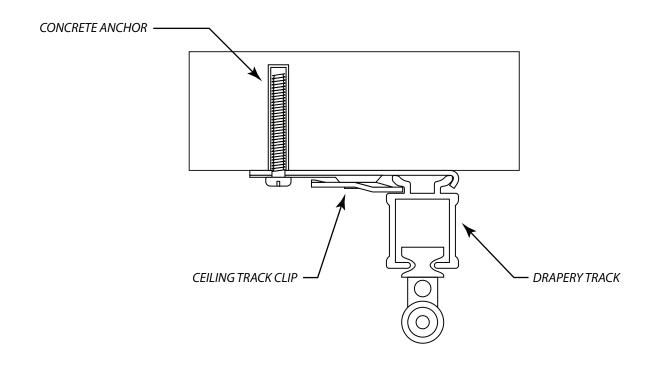

document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner. DO NOT SCALE

Project:

All materials disclosed in this 8300 Series Tracking System

to	Concrete Installation	
in ot	Date: 20-NOV-2008	Dimensions: Inches/Feet
is	Scale:	By:


C. Johnson



8300 Series - Concrete Wall Installation

- 1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
- Begin on one end of the track; and mark the holes on the wall. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
- 3. Pre-drill the wall. Insert a 1 1/4" concrete anchor.
- 4. Anchor wall bracket via a 1 1/4" #8 self tapping screw hex head or pan head recommended.
- 5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
- 6. Make sure that both ends of the tracks and the end stops are secured to the wall.



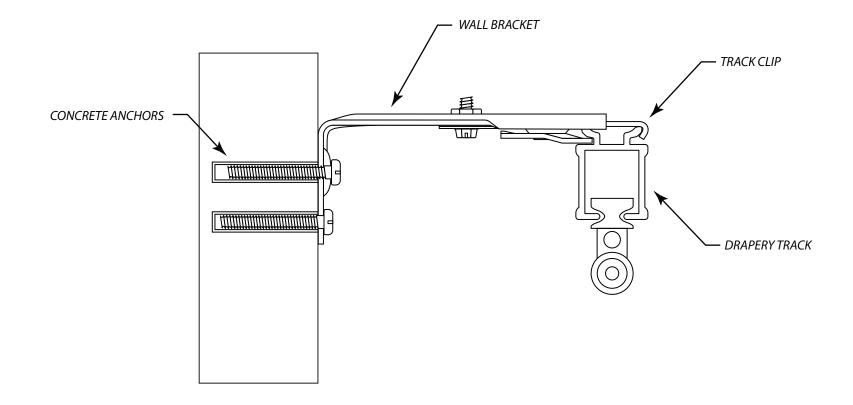

document are proprietary to Concrete Wall Installation Diamond Drapery Co., Inc. The Holder agrees to maintain it in 21-NOV-2008 confidence and must not replicate or reveal this information in any manner.

Project:

All materials disclosed in this 8300 Series Tracking System

Dimensions: Inches/Feet Scale: Ву: DO NOT SCALE C. Johnson

