



DRAPERY TRACKING INSTALLATION INSTRUCTIONS


8100 SERIES – DROP CEILING GRID INSTALLATION

The tools and materials that are required to install drapery track will vary depending upon the ceiling type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24" - 30" intervals beginning on one end of the track.
3. Anchor track via a 2" #8 self tapping screw hex head or pan head recommended. Track will be anchored directly to the drop ceiling grid.
4. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
5. Make sure that both ends of the tracks and the end stops are secured to the ceiling.

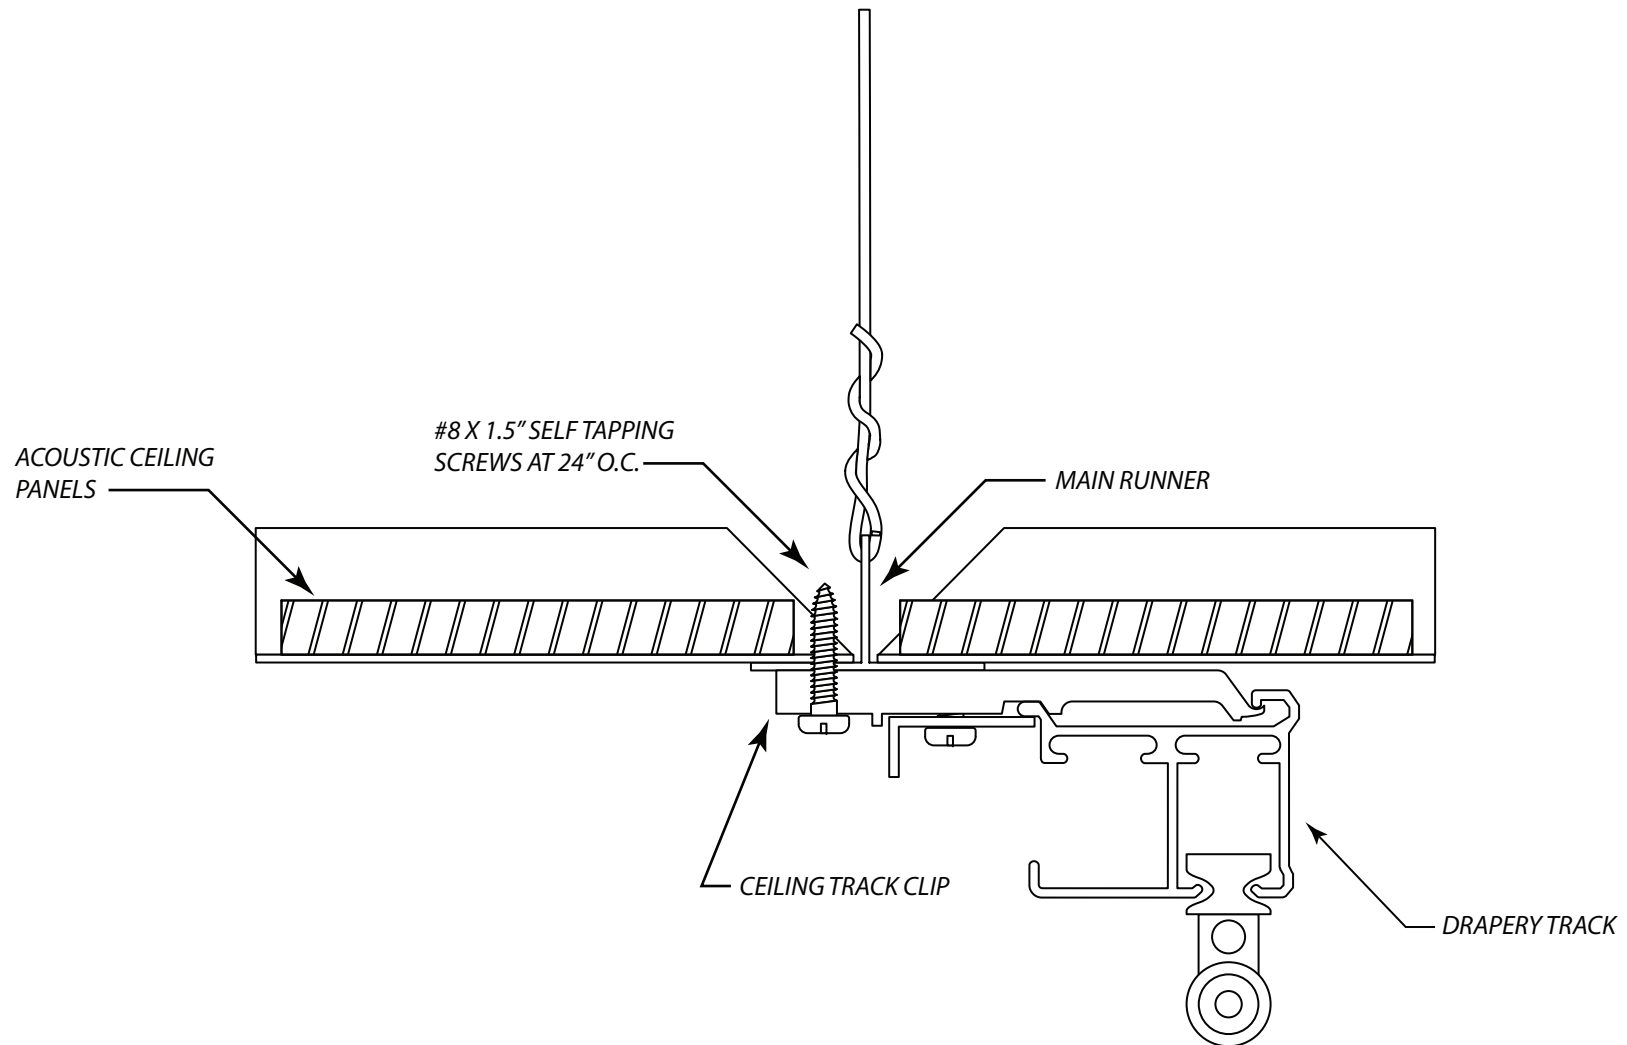

CONFIDENTIAL All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.	Project: 8100 Series Tracking System Drop Ceiling Installation	
	Date: 10-DEC-2008	Dimensions: Inches/Feet
	Scale: DO NOT SCALE	By: C. Johnson
	 <p>7439 Lampson Avenue Garden Grove, CA 92841 (714) 761-4543 OFFICE (714) 761-4623 FAX</p>	

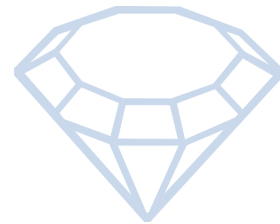


DRAPERY TRACKING INSTALLATION INSTRUCTIONS

8100 SERIES – SHEETROCK (DRYWALL) CEILING INSTALLATION

The tools and materials that are required to install drapery track will vary depending upon the ceiling type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24" - 30" intervals beginning on one end of the track.
3. Pre-drill the ceiling.
4. Anchor track via a 3" hex head bolt and wings. Toggle will be 1/8" in diameter. Slotted hex head or Robertson head is recommended.
5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
6. Make sure that both ends of the tracks and the end stops are secured to the ceiling.

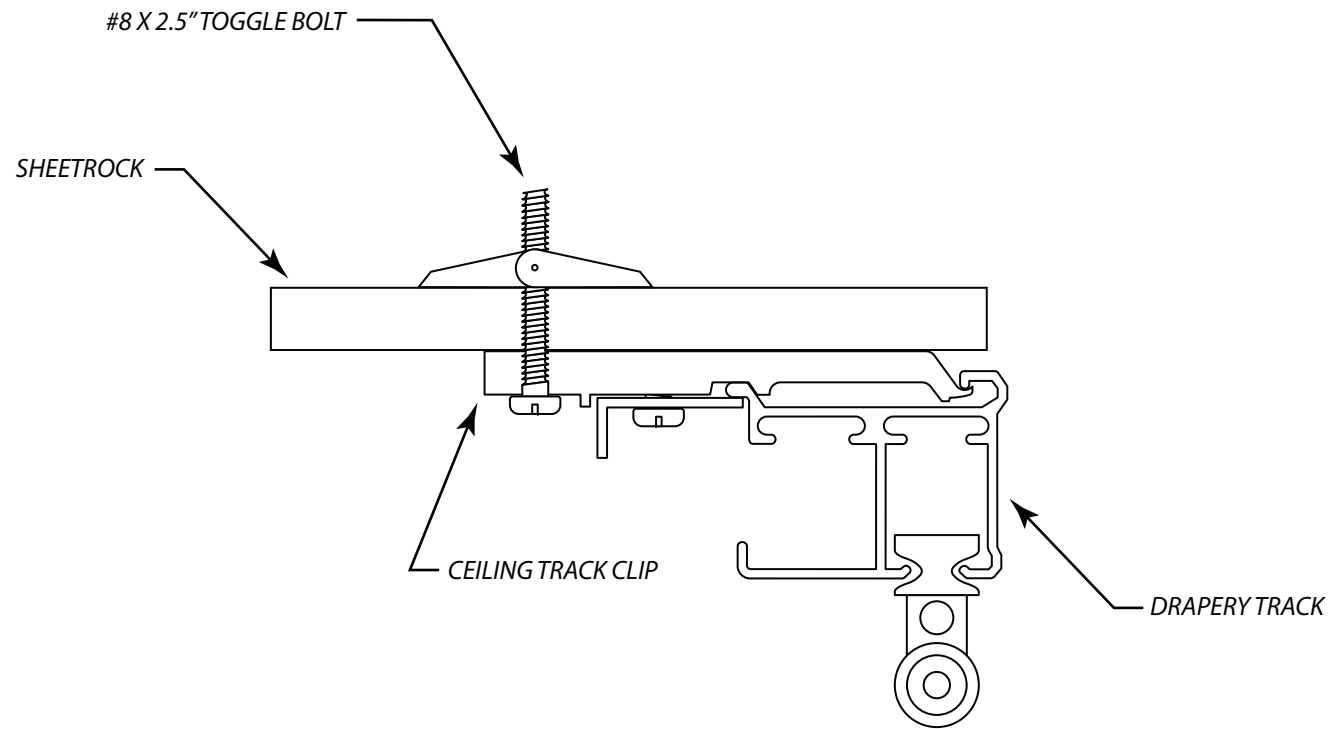

CONFIDENTIAL

All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

Project:

8100 Series Tracking System
Sheetrock Installation

Date:

10-DEC-2008

Dimensions:

Inches/Feet

Scale:


DO NOT SCALE

By:

C. Johnson



7439 Lampson Avenue
Garden Grove, CA 92841
(714) 761-4543 OFFICE (714) 761-4623 FAX

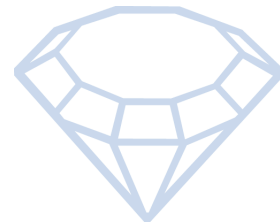


DRAPERY TRACKING INSTALLATION INSTRUCTIONS

8100 SERIES – SHEETROCK (DRYWALL) WALL INSTALLATION

The tools and materials that are required to install drapery track will vary depending upon the wall type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the wall. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
3. Pre-drill the wall.
4. Anchor wall bracket via a 3" hex head bolt and wings. Toggle will be 1/8" in diameter. Slotted hex head or Robertson head is recommended.
5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
6. Make sure that both ends of the tracks and the end stops are secured to the wall.

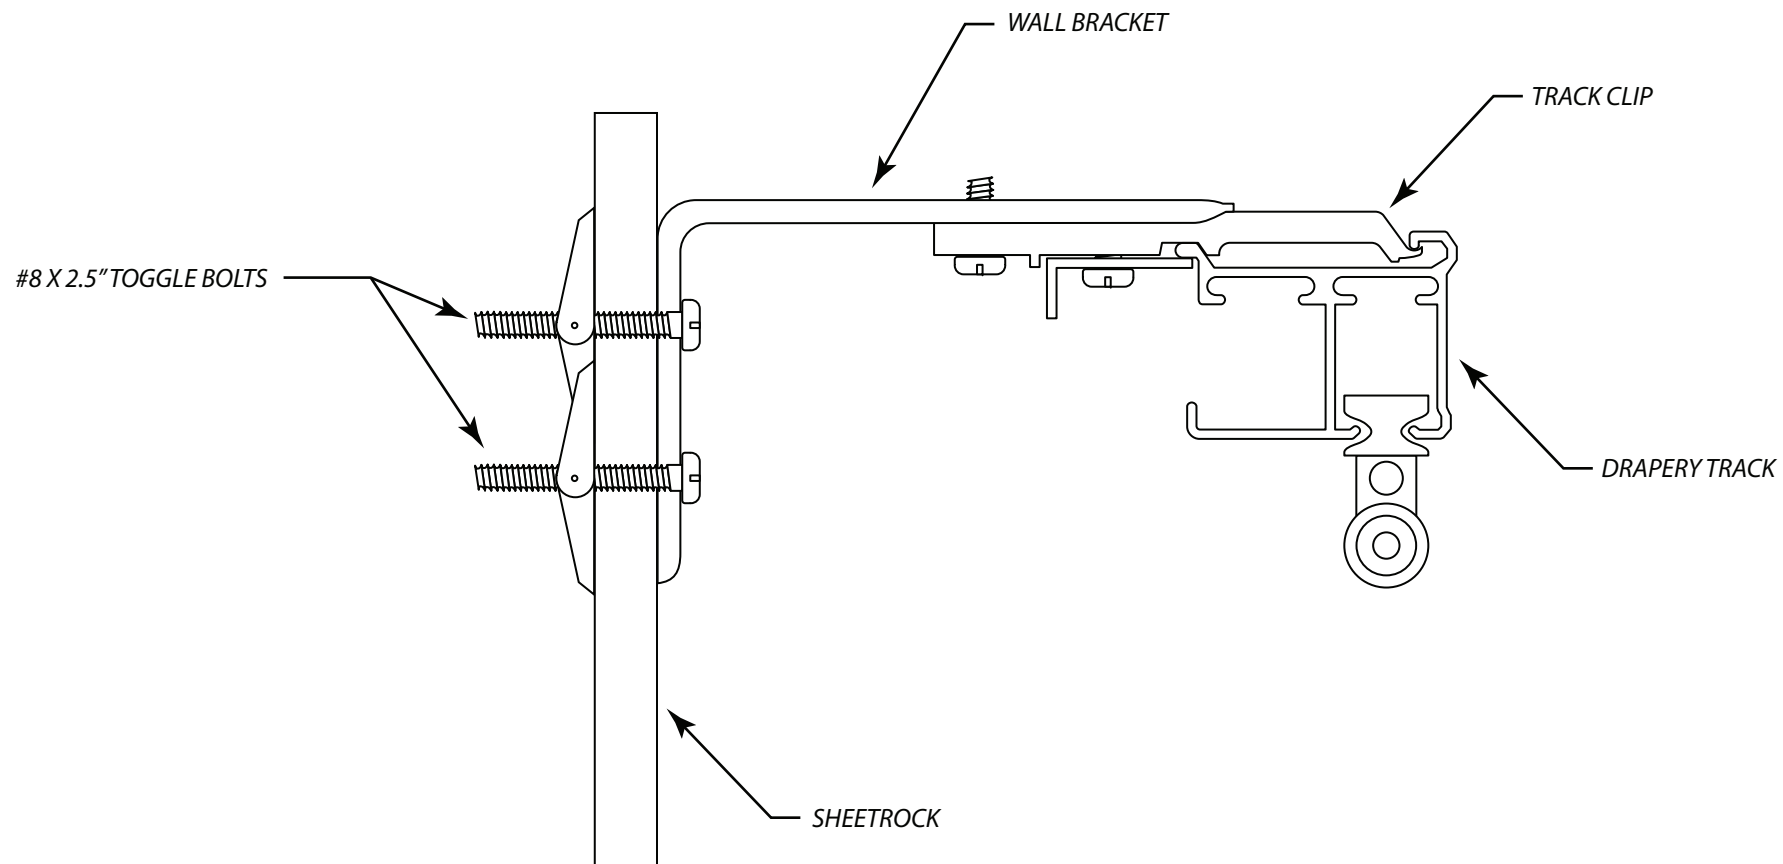

CONFIDENTIAL

All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

Project:

8100 Series Tracking System
Sheetrock Wall Mount Installation

Date:

10-DEC-2008

Dimensions:

Inches/Feet

Scale:


DO NOT SCALE

By:

C. Johnson



7439 Lampson Avenue
Garden Grove, CA 92841
(714) 761-4543 OFFICE (714) 761-4623 FAX

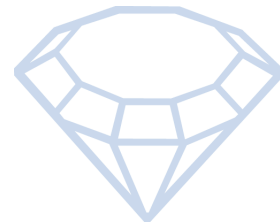


DRAPERY TRACKING INSTALLATION INSTRUCTIONS

8100 SERIES – WOOD CEILING INSTALLATION

The tools and materials that are required to install drapery track will vary depending upon the ceiling type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24" - 30" intervals beginning on one end of the track.
3. Anchor track via a 2" #8 self tapping screw hex head or pan head recommended. Track will be anchored directly to the wood block.
4. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
5. Make sure that both ends of the tracks and the end stops are secured to the ceiling.

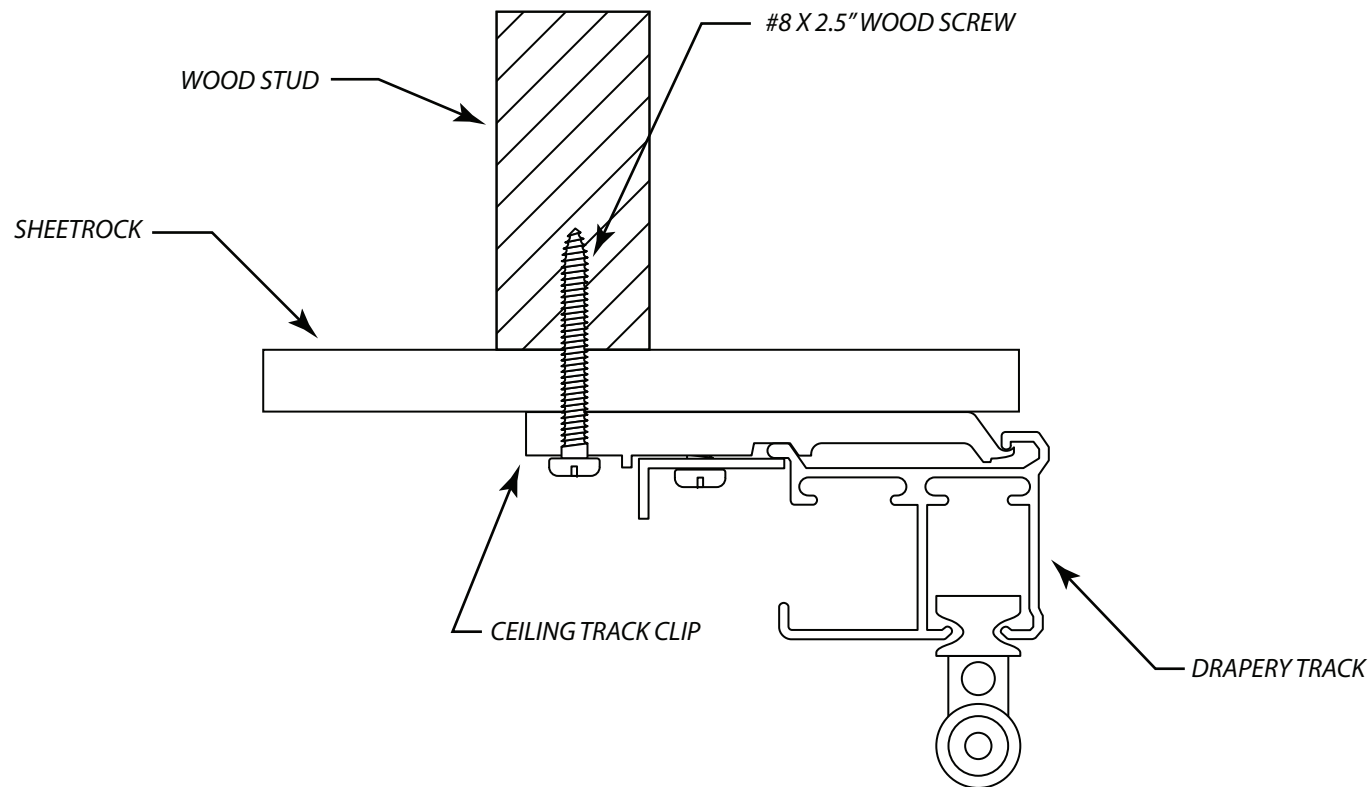

CONFIDENTIAL

All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

Project:

8100 Series Tracking System
Wood Stud Installation

Date:

10-DEC-2008

Dimensions:

Inches/Feet

Scale:


DO NOT SCALE

By:

C. Johnson



7439 Lampson Avenue
Garden Grove, CA 92841
(714) 761-4543 OFFICE (714) 761-4623 FAX

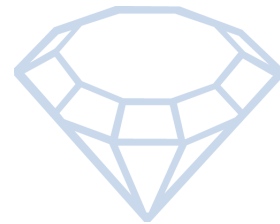



DRAPERY TRACKING INSTALLATION INSTRUCTIONS


8100 SERIES – WOOD WALL INSTALLATION

The tools and materials that are required to install drapery track will vary depending upon the wall type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the wall. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
3. Anchor track via a 2" #8 self tapping screw hex head or pan head recommended. Track will be anchored directly to the drop ceiling grid.
4. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
5. Make sure that both ends of the tracks and the end stops are secured to the wall.

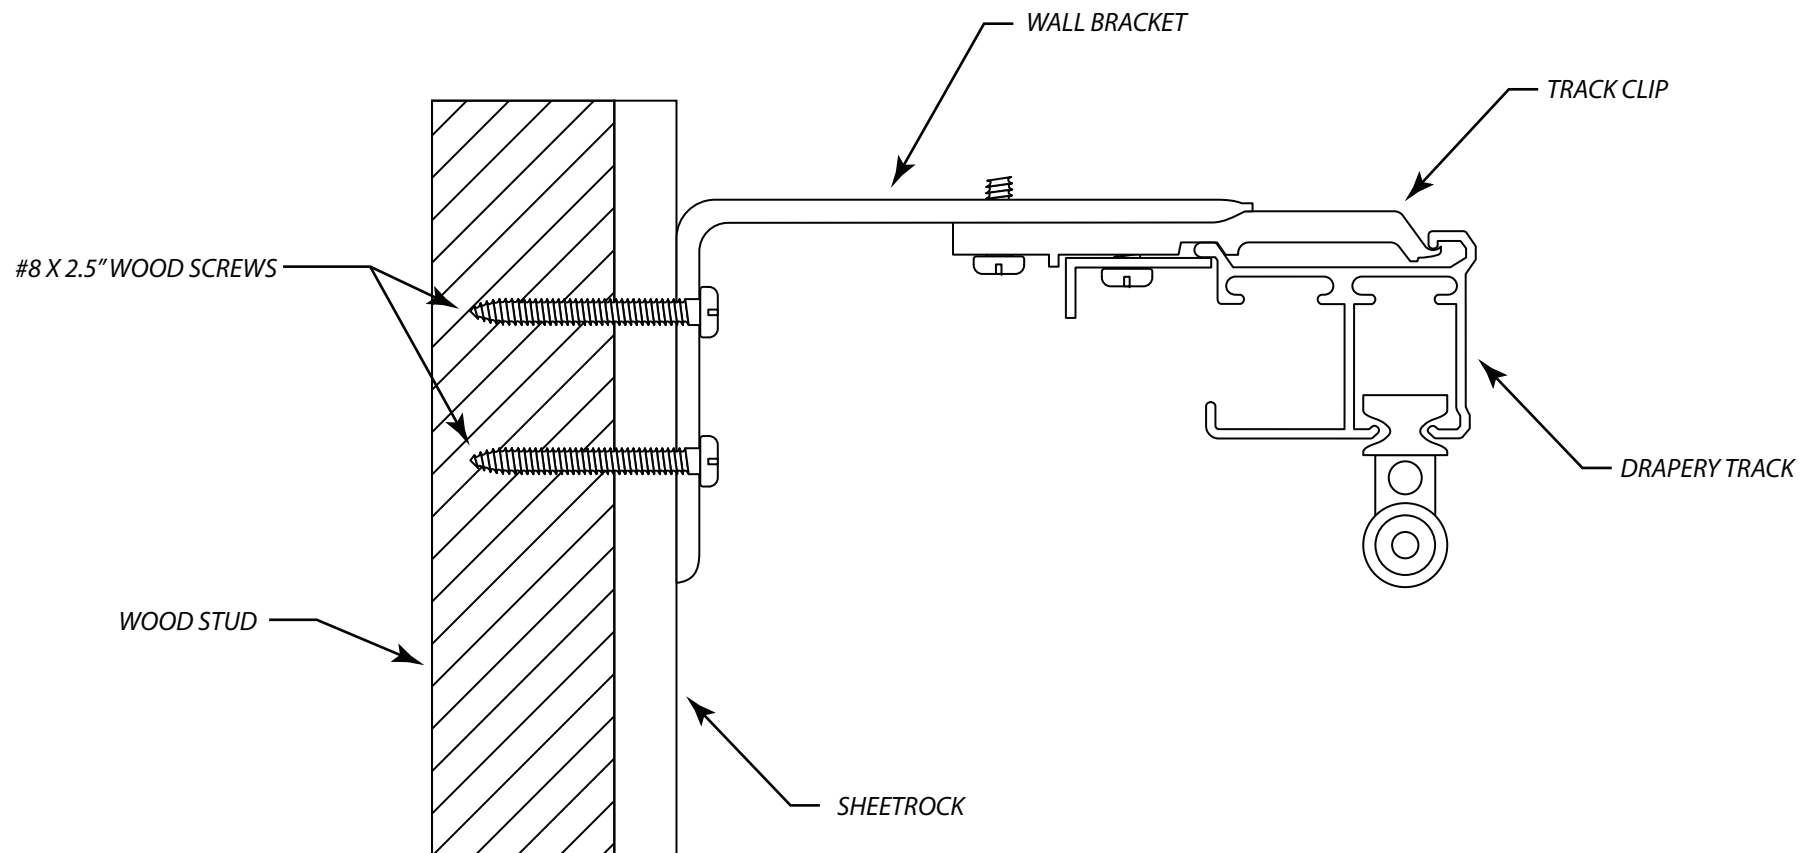

CONFIDENTIAL All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.		Project: 8100 Series Tracking System Wall Mount Installation	
		Date: 10-DEC-2008	Dimensions: Inches/Feet
		Scale: DO NOT SCALE	By: C. Johnson
		 <p>7439 Lampson Avenue Garden Grove, CA 92841 (714) 761-4543 OFFICE (714) 761-4623 FAX</p>	

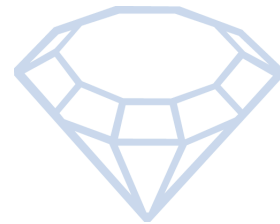


DRAPERY TRACKING INSTALLATION INSTRUCTIONS

8100 SERIES – CONCRETE CEILING INSTALLATION


The tools and materials that are required to install drapery track will vary depending upon the ceiling type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the ceiling. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
3. Pre-drill the ceiling. Insert a 1 1/4" concrete anchor.
4. Anchor track via a 1 1/4" #8 self tapping screw hex head or pan head recommended.
5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
6. Make sure that both ends of the tracks and the end stops are secured to the ceiling.

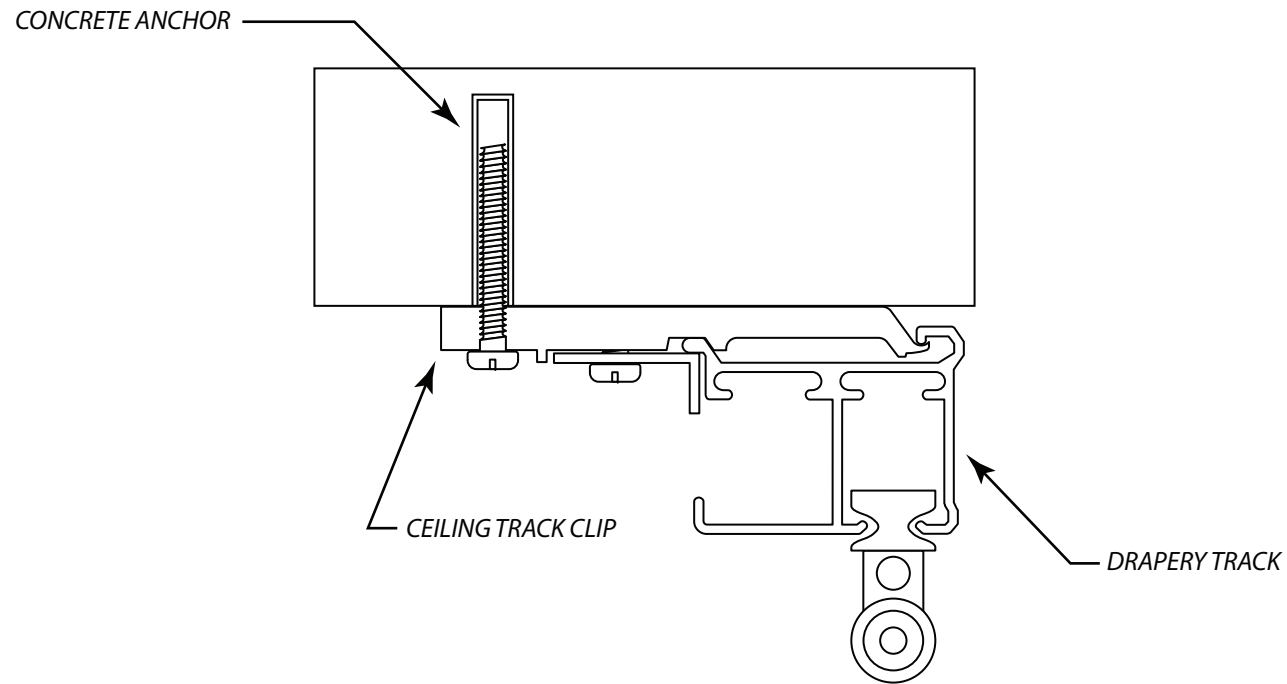

CONFIDENTIAL All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.	Project: 8100 Series Tracking System Concrete Installation	
	Date: 10-DEC-2008	Dimensions: Inches/Feet
	Scale: DO NOT SCALE	By: C. Johnson



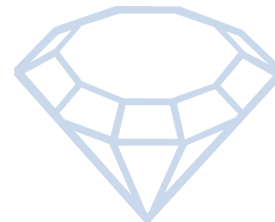


DRAPERY TRACKING INSTALLATION INSTRUCTIONS

8100 SERIES – CONCRETE WALL INSTALLATION

The tools and materials that are required to install drapery track will vary depending upon the wall type. Diamond Drapery does not provide the fasteners or the tools that are required to install drapery track. Diamond Drapery does not assume liability on any installation method. The techniques listed here are merely industry recommendations.

1. Place the drapery track on the floor. Lay out the configurations to ensure that the track is positioned exactly where it is desired.
2. Begin on one end of the track; and mark the holes on the wall. Repeat this process on the track as well. Note: track should be secured at 24"- 30" intervals beginning on one end of the track.
3. Pre-drill the wall. Insert a 1 ¼" concrete anchor.
4. Anchor wall bracket via a 1 ¼" #8 self tapping screw hex head or pan head recommended.
5. If the track is spliced, check to ensure that there are no obstructions. Then place the track splice over one end of the track and secure via the steps listed above. Slide the other side of the track into the splice and secure with a fastener. This will ensure that the carriers will not bind at this location.
6. Make sure that both ends of the tracks and the end stops are secured to the wall.

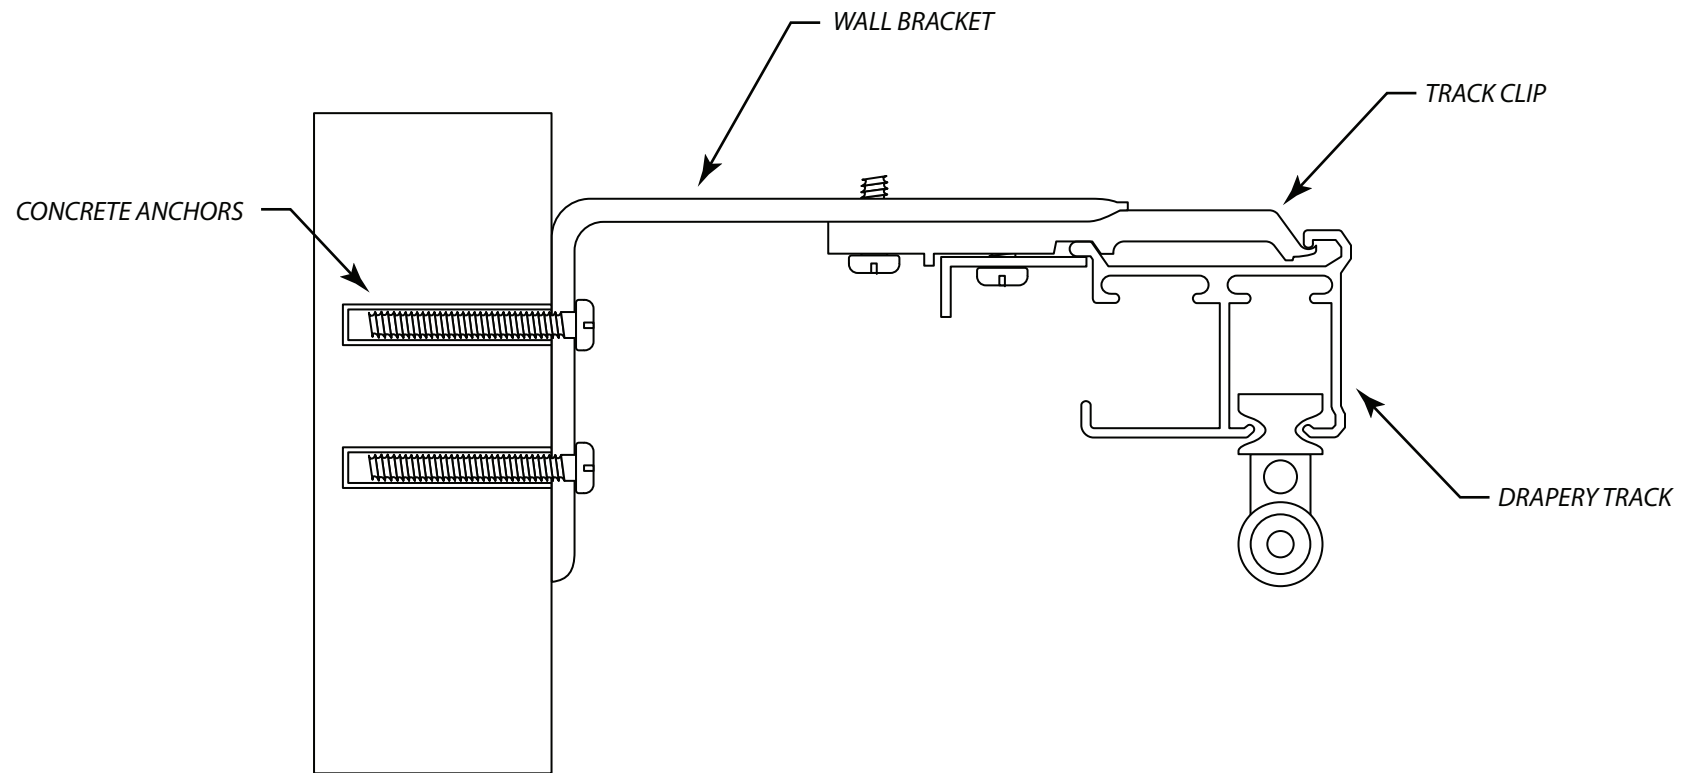

CONFIDENTIAL

All materials disclosed in this document are proprietary to Diamond Drapery Co., Inc. The Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.

Project:

8100 Series Tracking System
Concrete Wall Installation

Date:

10-DEC-2008

Dimensions:

Inches/Feet

Scale:

DO NOT SCALE

By:

C. Johnson



7439 Lampson Avenue
Garden Grove, CA 92841
(714) 761-4543 OFFICE (714) 761-4623 FAX